

Highlights:


- Multi-tapping 100V line transformer
- 5" full range driver
- Steel front grill with flame retardant materials
- Steel fire protection dome

Product information:

The CSF506/W is a fire-protected ceiling speaker with a 5" cone, capable of producing a power of 6 Watt. It ensures a good reproduction of speech and background music. It is fitted with a 100V line transformer with power taps for 6 Watt and 3 Watt to be used in large 100V PA systems. The speaker is equipped with a special steel fire protection dome fitted around the speaker and a steel front grill with flame-retardant materials. The MK2 version is painted in RAL9016, to harmonize the AUDAC ceiling speaker range we decided to bring out the CSF506/W variant in RAL9010.

Applications:

- Bars & Restaurants
- Retail
- Hotels
- Corporate

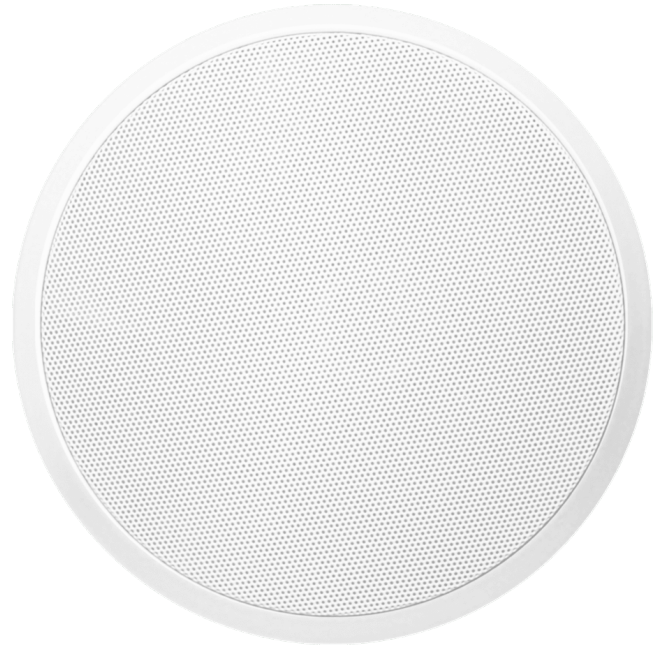

Voltage:

 100 Volt

System specifications:

Speaker type		Broadband
Peak power handling		20 W
Program power handling		10 W
RMS/AES power handling		6 W
Line Transformer Tappings	1	6 W / 1666 Ω
	2	3 W / 3333 Ω
Impedance		8 Ω
Frequency	Response (\pm 3 dB)	90 Hz - 18 kHz
Sound Pressure (Max. W/1m)		90 dB
Drivers		5"

Product Features:

Dimensions		180 x 127 mm (\emptyset x D)
Cut-out measurement		160 mm (\emptyset)
Weight		1.300 kg
Construction		Steel fire protection dome
Front finish		Steel with flame retardant materials

Variants:

- CSF506/W - White version - RAL9010