



This 4K UHD HDMI Splitter provides an advanced solution for splitting and distributing a single HDMI input to 2 HDMI outputs. This splitter provides a high level of audio and video performance with support for video resolutions up to 4K@60Hz (4:2:0) and high definition digital audio formats such as LPCM 7.1, with audio sampling rates up to 192kHz, Bitstream, and HD Bitstream. Standard EDID management functionality is included and the System Reset function allows the unit to automatically change the input selection on any connected, CEC enabled, TVs to the input the unit is currently connected to.


### PANELS



Front View

Rear View

### DIAGRAM

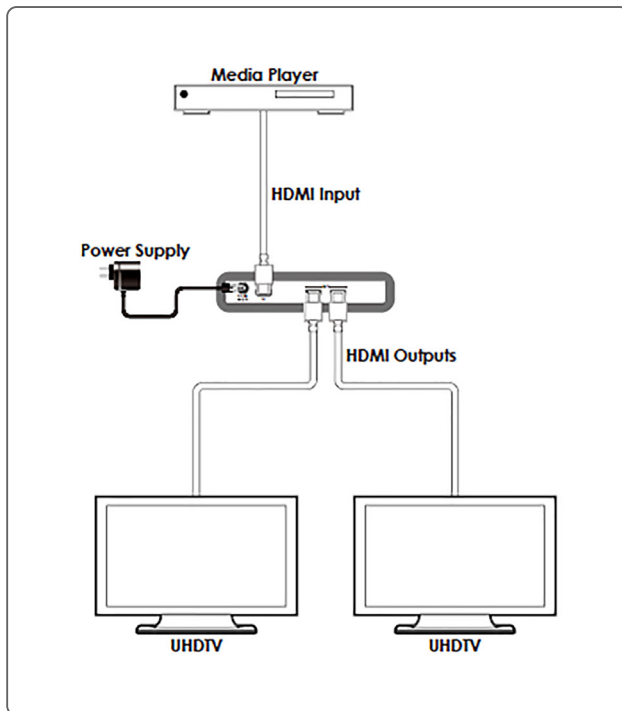

### FEATURES

- Simultaneous display of a single 4K source on up to two 4K displays
- 3D signal support (with 3D source and compatible 3D TV)
- Supports pass-through of audio formats including LPCM 2.0/5.1/7.1, Bitstream, and HD Bitstream
- System Reset function (CEC active source command)
- EDID management control including “Standard” (Internal EDID) mode and “TV” (External Display EDID) modes

### SPECIFICATIONS

#### Interfaces

<b>Input Port</b>	1 HDMI (Type-A)
<b>Output Port</b>	2 HDMI (Type-A)
<b>Service Port</b>	USB (Mini B)

#### Video

<b>HDMI Compliance</b>	HDMI 1.4 (DVI 1.0)
<b>HDCP Compliance</b>	1.4
<b>Input Signal Type</b>	4K@60 8bit YUV 4:2:0
<b>Output Signal Type</b>	4K@60 8bit YUV 4:2:0

#### Resolutions

<b>Maximum Input</b>	HDMI	4096x2160@60Hz YUV 4:2:0 8bit
<b>Maximum Output</b>	HDMI	4096x2160@60Hz YUV 4:2:0 8bit

#### Audio

<b>Digital Format</b>	HDMI, LPCM(8 Channels), Bitstream, HD Bitstream
-----------------------	---

#### Power

<b>Power Supply</b>	5V/1.2A DC
<b>Power Consumption</b>	1.21W

#### Enclosure

<b>Chassis Material</b>	Metal
<b>Chassis Color</b>	Black
<b>Dimensions (W×H×D)</b>	161mm×22mm×68mm [Case Only] 161mm×26mm×76.5mm [All Inclusive]
<b>Weight</b>	306g

#### Field Firmware Update

#### PC

### ORDERING INFORMATION

<b>Model No.</b>	Product Description
<b>CPRO-U2T</b>	UHD 1×2 HDMI Splitter