


# ▶ CP-1261D

## PC/HD to DVI Format Converter




This PC/HD to DVI Format converter can convert and upgrade your input signal from analog to digital and VGA to a DVI signal, whether your source is a RGB signal from a PC or a Component signal (through the supplied HD-15 VGA to 3 RCA cable).

### PANELS



### DIAGRAM

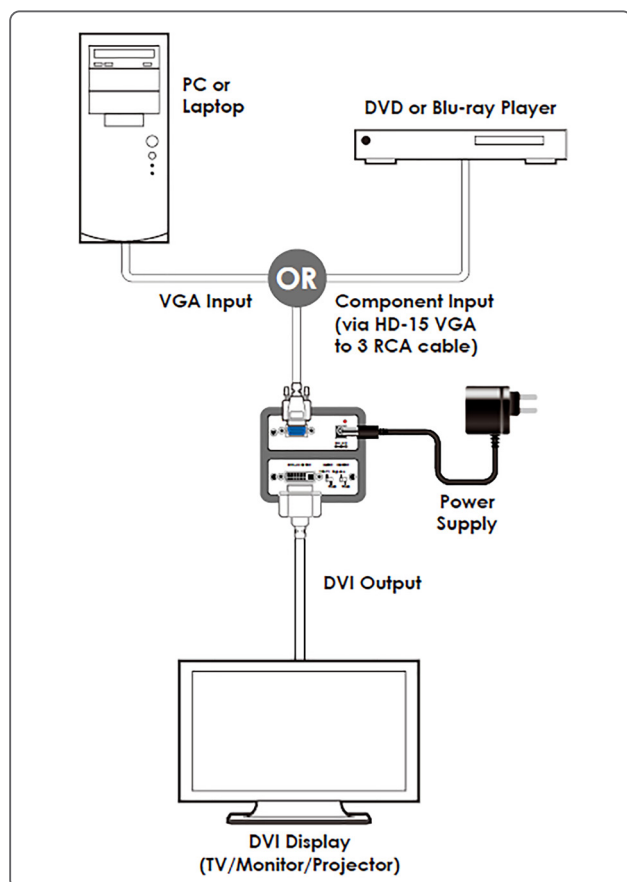

### FEATURES

- Connect computers with analog PC output or DVD Players with HD component output to digital DVI monitors or projectors
- Manual selection of analog RGB or Component (YPbPr) sources
- Manual selection of output between Bypass or digital RGB
- Supports input resolutions up to 1920×1200@60 (RB) for PC and 1920×1080p@60 Hz for HD component
- Built-in EDID management

### SPECIFICATIONS

#### Interfaces

|                    |                                 |
|--------------------|---------------------------------|
| <b>Input Port</b>  | 1×Analog HD-15 (RGBHV or YPbPr) |
| <b>Output Port</b> | 1×DVI-I (DVI-D output only)     |

#### Video

|                           |               |
|---------------------------|---------------|
| <b>HDCP Compliance</b>    | N/A           |
| <b>Input Signal Type</b>  | 1920×1080P@60 |
| <b>Output Signal Type</b> | 1920x1080p@60 |

| Resolutions           |       |                                    |
|-----------------------|-------|------------------------------------|
| <b>Maximum Input</b>  | HD-15 | 1920×1200@60 (RB)<br>1920×1080p@60 |
| <b>Maximum Output</b> | DVI   | 1920×1080P@60                      |

#### Power

|                          |            |
|--------------------------|------------|
| <b>Power Supply</b>      | 5 V/1 A DC |
| <b>Power Consumption</b> | 3.6 W      |

#### Enclosure

|                           |                        |
|---------------------------|------------------------|
| <b>Chassis Material</b>   | Aluminum               |
| <b>Chassis Color</b>      | Silver                 |
| <b>Dimensions (W×H×D)</b> | 76 mm × 30 mm × 105 mm |
| <b>Weight</b>             | 190g                   |

#### Field Firmware Update

PCB on board, uses RS232

### ORDERING INFORMATION

|                  |                               |
|------------------|-------------------------------|
| <b>Model No.</b> | Product Description           |
| <b>CP-1261D</b>  | PC/HD to DVI Format Converter |